


BANDO WIPER EDGE *EX*


SPECIAL POLYURETHANE MACHINE WAY WIPERS

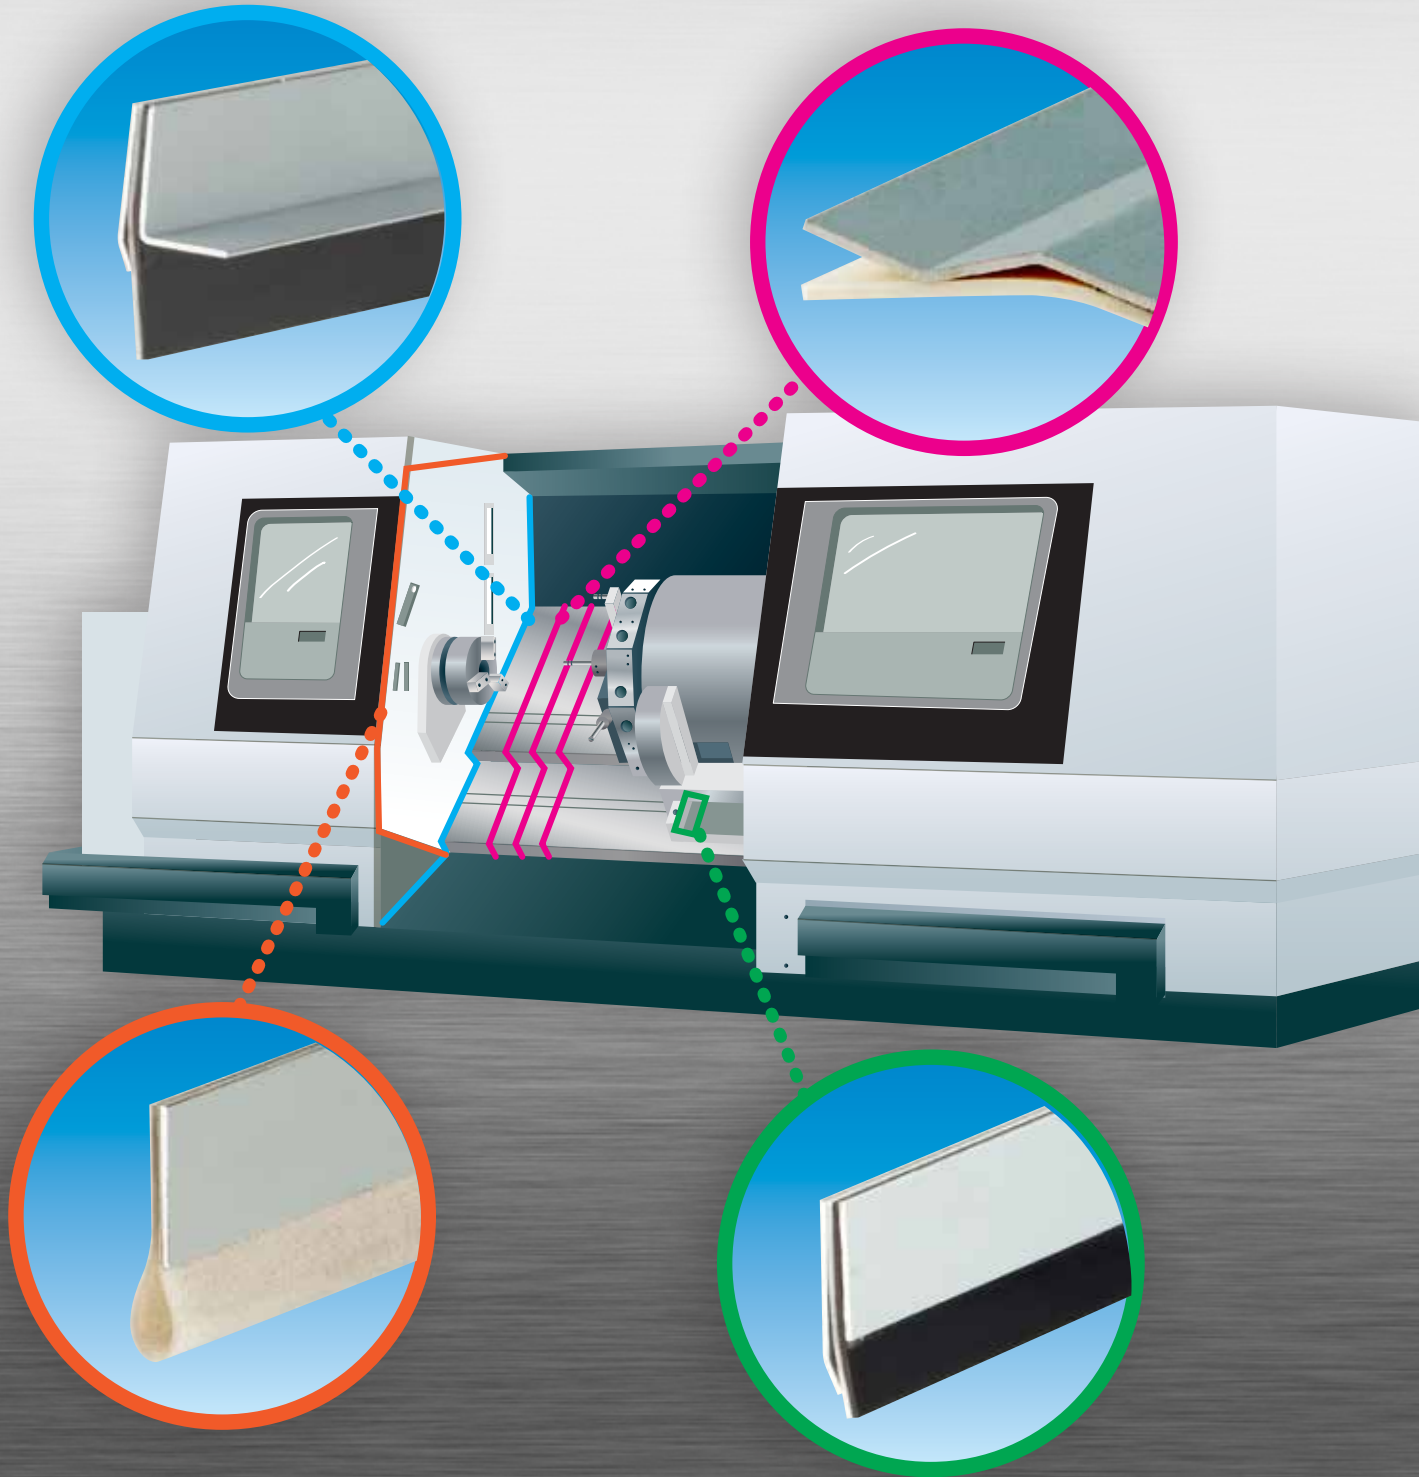




BANDO

DESIGN


- Superior protection from hot chips, abrasive materials and cooling agents
- Abrasion resistant
- Less down time

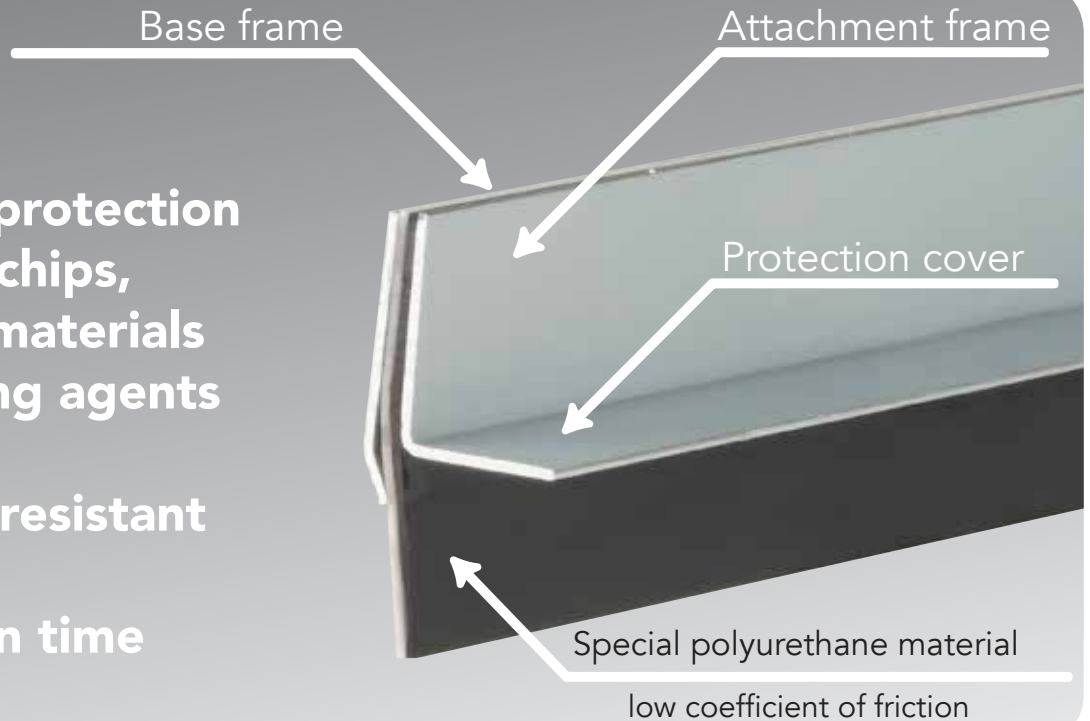

Coolant Resistance (test condition) 70° dipping

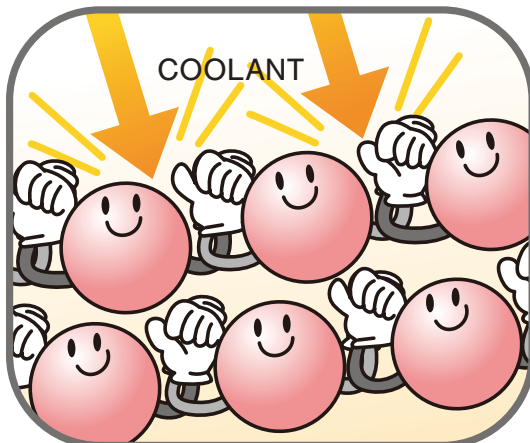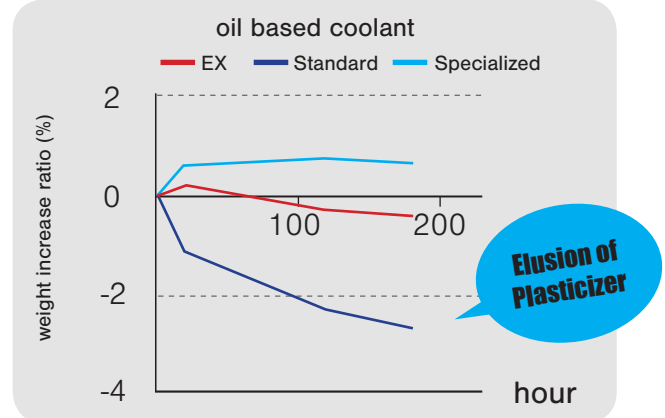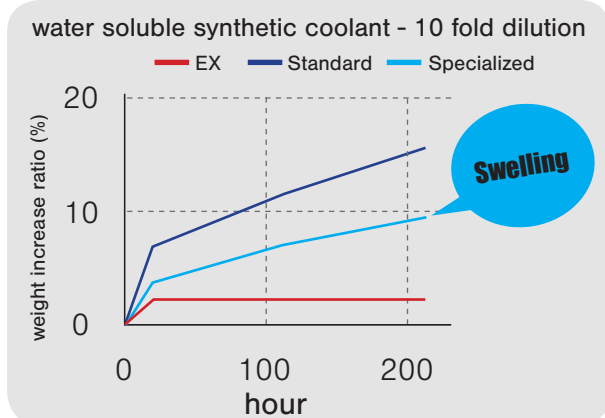


Bando Wiper Edge EX

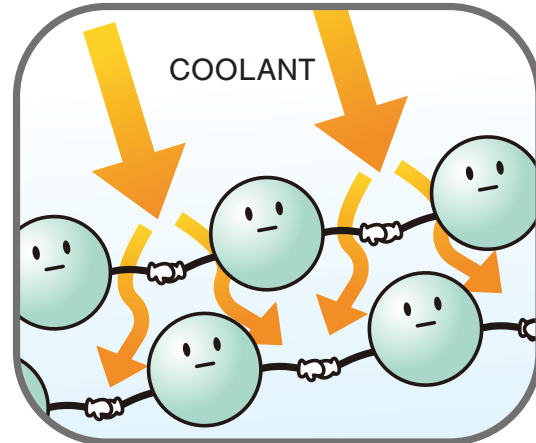

Standard

ADVANTAGES

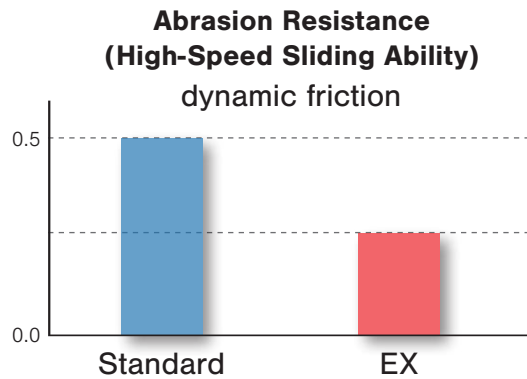

General Requirements for Wiper Blade

- Turning machine
 - Coolant Resistance
- Machining Center
 - High Speed Sliding Ability
 - > Bando Wiper Edge EX meets or exceeds customer's expectations

Long Life (Abrasion Resistance)



Bando Wiper Edge EX

Minimum wear

Test Condition

Chip: Aluminum


Coolant: Moresco Neo Cool Bio-60E

Movement Speed: 100m/min Recommended press fit width: 3.0 mm

Running Distance: 300km (150,000 times of 1m back and forth motion)


*Superior Abrasion Resistance

Lineup

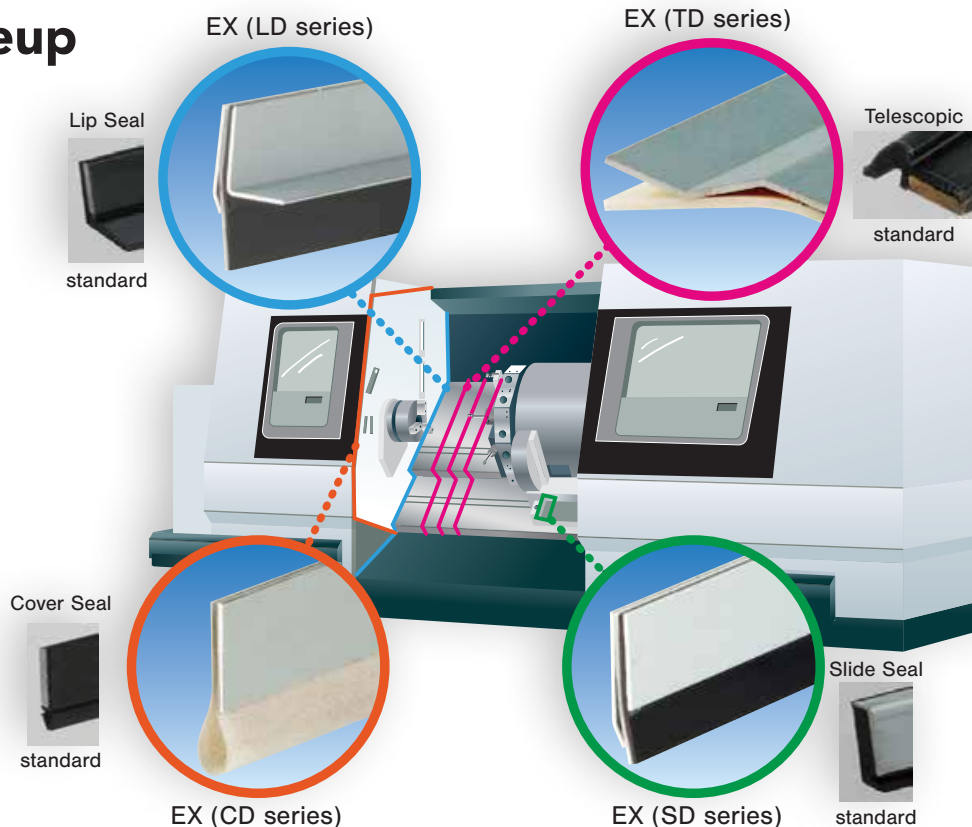

PRODUCT LINE UP


Lip Seal

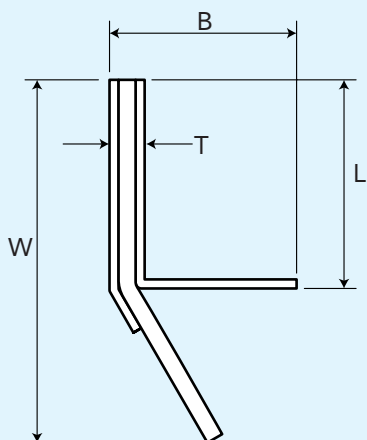

unit (mm)

*1	W	B	L	T	*2
900	32	17	18	3	5


Slide Seal

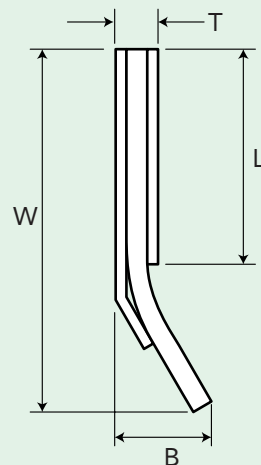

unit (mm)

*1	W	B	L	T	*2
900	30	9	16	3	5


Cover Seal

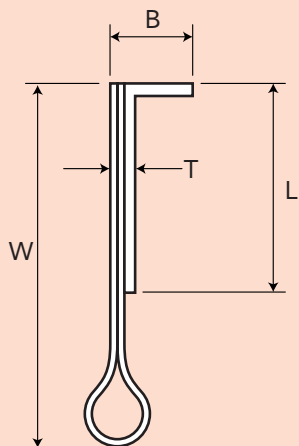

unit (mm)

*1	W	B	L	T	*2
900	34	8	19	3	1

Telescopic Seal

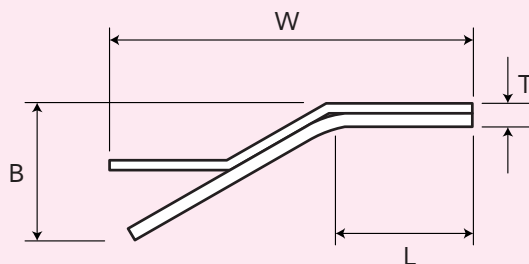

unit (mm)

*1	W	B	L	T	*2
900	43	16	15	3	5

*1 Total Length

*2 Recommended press fit width

*Other sizes on request

Patent Pending

Customer Service: 1(800) 829-6612 | serviceexpress@bandousa.com | www.BandoUSA.com BUI 1051

